



BITUMINOUS PAVEMENT WITH CONCRETE CURB & GUTTER

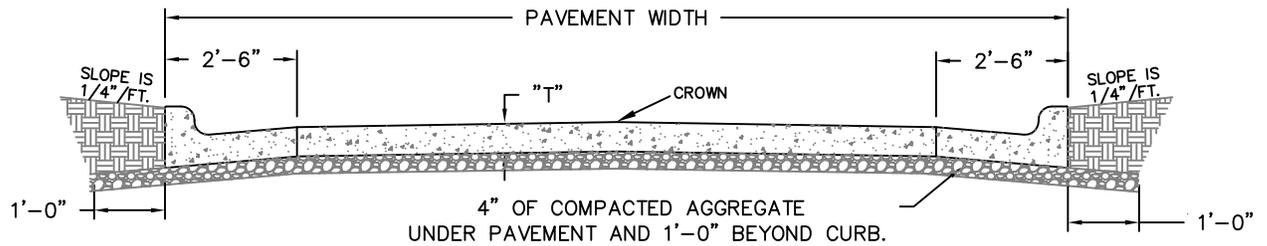

PORTLAND CEMENT CONCRETE PAVEMENT AND CONCRETE CURB & GUTTER

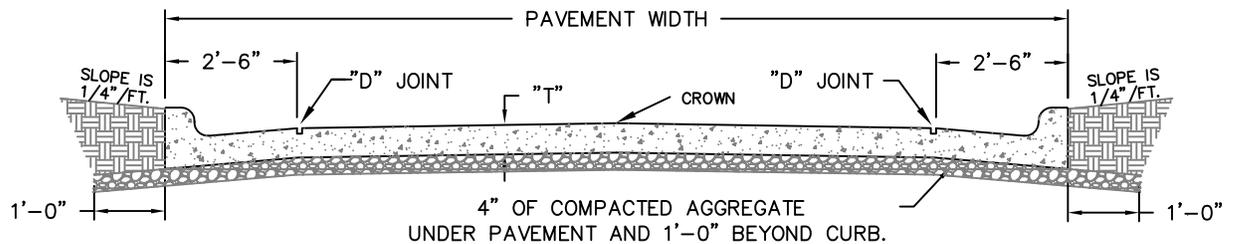

PORTLAND CEMENT CONCRETE PAVEMENT WITH INTEGRAL CURB

STANDARD PAVEMENT WIDTH AND THICKNESS			
STREET TYPE	"T"	"A"	"B"
ALLEY/LOCAL	6"	2"	5"
COLLECTOR	6"	2"	6"
SECONDARY ARTERIAL	7"	2"	8"
PRIMARY ARTERIAL	8"	2"	9"

NOTES: CROSS SLOPE SHALL BE 1/4"/FT. ON ALL PAVEMENTS EXCEPT ALLEYS, SEE STANDARD DRAWING ST-4.

WIDTH OF PAVEMENT IS SUBJECT TO REQUIREMENTS OF THE PLANNING DEPARTMENT AND MAY VARY FROM THE STANDARDS.

TO CREATE A GUTTER SECTION THE CONTRACTOR SHALL FORM A 2" RISE 2' FROM THE INSIDE OF THE CURB. PAVEMENT WIDTH WILL BE MEASURED FROM BACK OF CURBS ON IMPROVED STREETS. PAVEMENT CROWN SHOULD BE CENTERED IN RIGHT OF WAY.