

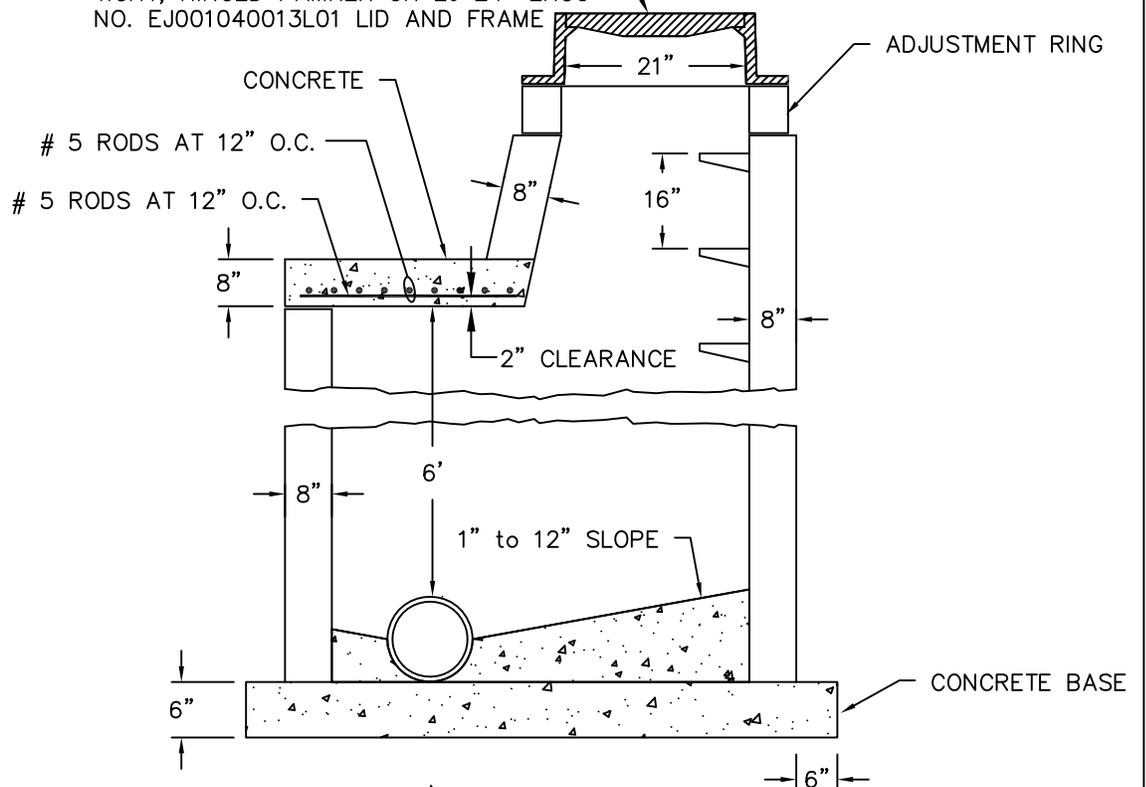


MANHOLE FRAME & COVER -TYPE "A".
 IF MANHOLE IS IN FLOODPLAIN OR
 PRONE TO SUBMERSION, USE WATER-
 TIGHT, HINGED PAMREX OR EJ 24" ERGO
 NO. EJ001040013L01 LID AND FRAME

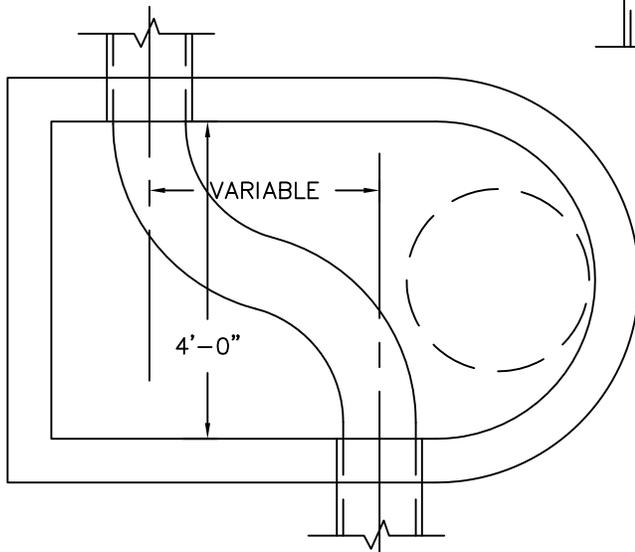

NOTES:

1. WALLS SHALL BE POURED CONCRETE OR PRECAST.
2. THICKNESS OF WALLS TO BE INCREASED TO 12" AT 12' BELOW UNDERSIDE OF FRAME.
3. CONSTRUCTION METHODS TO BE SAME AS STANDARD MANHOLES.

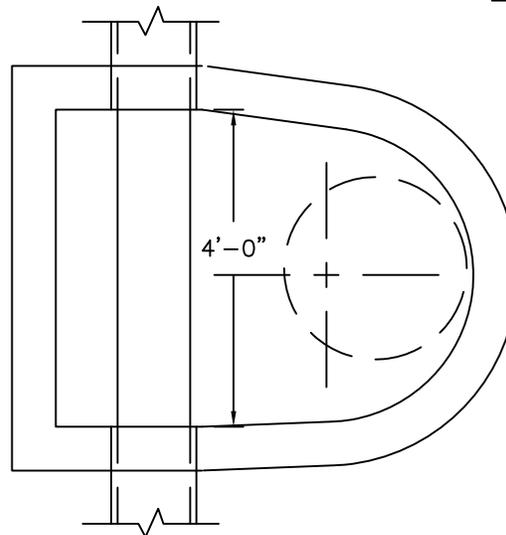

NOTE:
 NO MORE THAN 2 ADJUSTMENT RINGS,
 NOT TO EXCEED 18-INCHES